



LEE C. MOORE®
A Woolslayer Company

EzTurn™ BOP CRADLE

Rotating a BOP could never be easier.

The EzTurn™ BOP Cradle from Lee C. Moore facilitates single-handed rotation of an entire blowout preventer stack. Wellhead alignment has never been easier.

Another innovative, patent-pending design from Lee C. Moore, a Woolslayer Company engineers. Simple, efficient and safe. Goodbye tugger lines!



Visit us online at lcm-wci.com or speak with an expert: +1.800.864.8794 | +1.918.523.9191
Onshore | Offshore | Masts | Derricks | Custom Drilling Equipment | Service

EzTurn™ BOP CRADLE



Contact Information:

KINGDOM OF SAUDI ARABIA

Andrii Kurylyshyn
Supervisor, Production &
Service Support – Middle East
f: +966-050-756-5239
e: akurylyshyn@lcm-wci.com

INDIA

Saurabh Jawa (New Delhi)
f: +91 729-008-0707
e: sjawa@lcm-wci.com
Ankit Dhyani (New Delhi)
f: +91990-403-7987
e: adhyani@lcm-wci.com

INTERNATIONAL

Casey E. Halford
Director, Sales &
Field Services | USA
f: +1-918-520-0786
e: int-sales@lcm-wci.com

USA


Randon Lingle
f: +1 405-435-8891
e: rlingl@lcm-wci.com



Features and benefits:

- Full 360° rotation
- Easy to install gate design
- Integral roller assemblies contact either underneath side of BOP annular or customer furnished 42 in. diameter (or greater) double studed adapter
- Various models fit all API standard flange sizes
- Lift point spacing built to customer specification.
- Hook-type primary lifting eyes unless specified otherwise
- Interfaces with various BOP stack configurations and annular
- Four Shoulder Type Machinery Lifting Eye Bolts accommodate secondary BOP hoisting or stabilizing lines
- Two mounting positions for BOP transport skid
- Two primary lifting eyes

Dimensions/Schematic

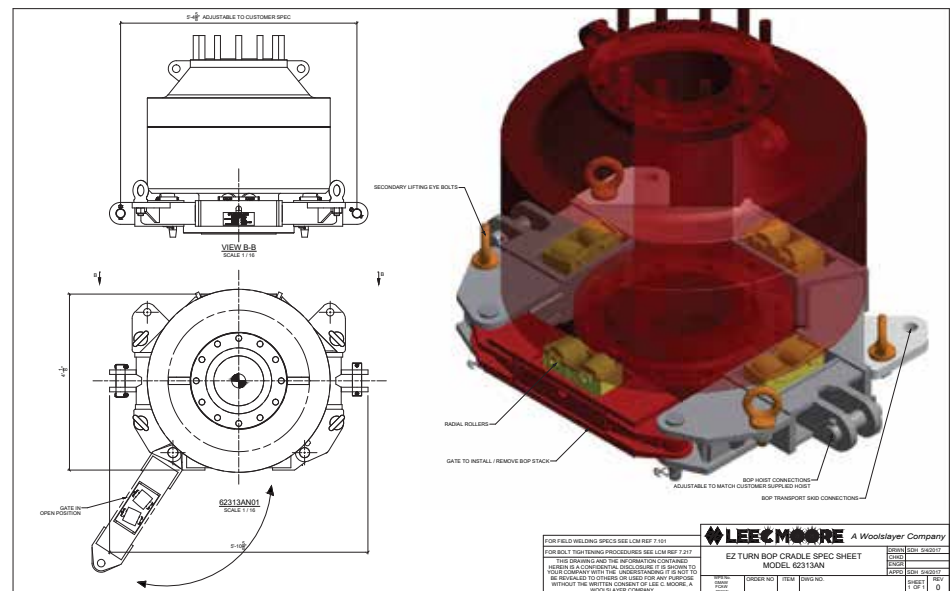

Specifications

1% (or less) Friction Coefficient for Rotating

20 ton - 60 ton Capacities

Drop-in Adapters to Accommodate Various Flange Sizes

Depth = 9"

Weight = 1,700 lbs